ATLAS METAL
1135 N.W. 159th DRIVE, MIAMI, FLORIDA 33169
TEL 305.625.2451 TOLL FREE 800.762.7565 FAX 305.623.0475
WWW.ATLASFOODSERV.COM SALES@ATLASFOODSERV.COM

Project: _____
Item No.: _____
Quantity: _____

DROP-IN SERVING EQUIPMENT

WCMD-C-3

COLD PAN

Refrigerated
with Side Coils
Self-Contained

- ☐ **WCMD-C-1**
- ☐ **WCMD-C-2**
- ☐ **WCMD-C-3**
- ☐ **WCMD-C-4**
- ☐ **WCMD-C-5**
- ☐ **WCMD-C-6**

SPECIFICATIONS

TOP: Constructed of 18 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top. Embossed mounting lugs are provided along the inner surface of the top to hold the removable separator channels in place.

LINER: The inner liner shall be 18 gauge, type 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. All corners are coved with a minimum 1/4" radius. **The liner has copper tubing firmly soldered to the exterior bottom and all sides.** A 3/4" dia. drain with strainer, 4" PVC nipple, and valve is provided.

INSULATION: The pan is fully insulated with high density polystyrene, 1/2" thick on all sides, 1-1/2" thick on the bottom and enclosed with a 22 gauge galvanized steel outer case.

REFRIGERATION SYSTEM: The compressor housing shall be fabricated from 14 gauge galvanized and bolted to the base of the unit. A fully self-contained condensing unit is provided with a hermetically sealed compressor and a thermostat control. The system is fully charged with CFC free refrigerant and ready to operate.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL:The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off thermostat switch and pilot light. A 6' long, 3-wire cord and plug (NEMA 5-15P) will be provided.

Specifications subject to change without notice.

STANDARD FEATURES

- Accommodates your deepest pan or insert - 9-3/4" deep
- Refrigerated copper tubing around the bottom and all sides - meets your toughest health department standards
- Fully insulated for maximum efficiency and energy savings
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- Accommodates standard 12" X 20" pans with the use of separator channel(s), or fractional size pans with the use of optional adapter bars
- 1-Year Parts & Labor Warranty
- NSF Certified; UL Listed

ACCESSORIES

- **5YW** - 5-Year Compressor Warranty
- **WFB** - Stainless steel perforated false bottom
- Stainless Steel adapter bars (pg DI-51-52)
- Stainless Steel adapter plates (pg DI-51-52)
- **CP** - Cover Plate with handles, S/S
- **2060-1** - Condensate Evaporator
- **RS** - Remote on/off switch for counter mounting
- **RDVE** - Rear Drain Valve Extension
- ***** **220 Volt - 50 Cycle** Compressor

These units have not been performance tested for use with potentially hazardous foods, and must be used with ice.

***Please see Operation & Installation Manual for ALL operation and maintenance details.**

*** Units with these accessories are not currently UL listed.**

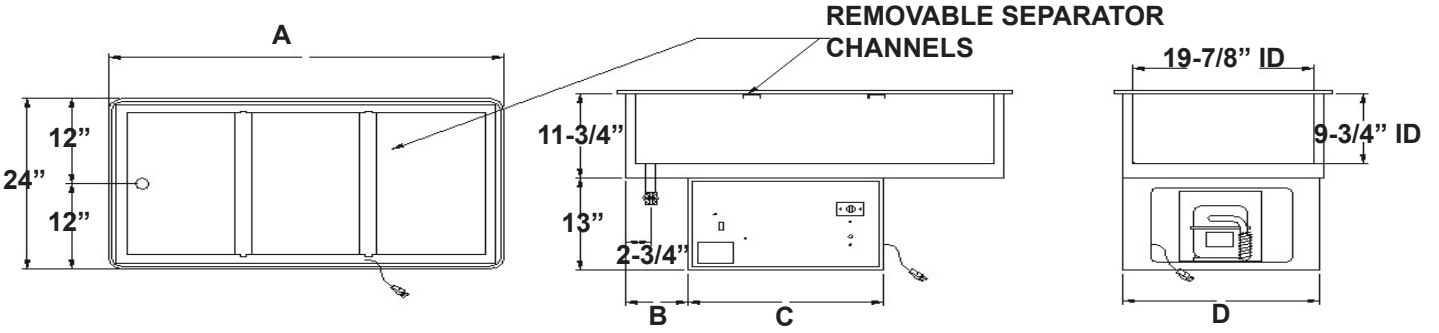

* Drain Location on 16” Dimension

MODEL	PAN OPENINGS	PAN SIZE	“A”	“B”	“C”	“D”	CUT-OUT REQUIRED	ELECTRICAL CHARACTERISTICS	SHIP WT. (LBS.)
*WCMD-C-1	1	19-7/8” X 11-3/4” X 9-3/4” *(50.4 X 29.8 X 24.7cm)*	16” *(40.6cm)*	3-7/8” *(9.8cm)*	18” *(45.7cm)*	13-3/4” *(34.9cm)*	22-1/4” X 14-1/4” *(56.5 X 36.1cm)*	4.2 amps. - 120V - 1/5HP	144 *(65.3kg)*
WCMD-C-2	2	19-7/8” X 25-1/2” X 9-3/4” *(50.4 X 64.7 X 24.7cm)*	29-3/4” *(75.2cm)*	5-5/8” *(15.2cm)*	21-1/2” *(54.6cm)*	21-5/8” *(54.9cm)*	22-1/4” X 28” *(56.5 X 71.1cm)*	4.2 amps. - 120V - 1/5HP	184 *(83.4kg)*
WCMD-C-3	3	19-7/8” X 39-1/4” X 9-3/4” *(50.4 X 99.6 X 24.7cm)*	43-1/2” *(110.4cm)*	7” *(17.7cm)*	21-1/2” *(54.6cm)*	21-5/8” *(54.9cm)*	22-1/4” X 41-3/4” *(56.5 X 106cm)*	4.2 amps. - 120V - 1/5HP	212 *(96.1kg*
WCMD-C-4	4	19-7/8” X 53” X 9-3/4” *(50.4 X 134.6 X 24.7cm)*	57-1/4” *(145.4cm)*	7” *(17.7cm)*	21-1/2” *(54.6cm)*	21-5/8” *(54.9cm)*	22-1/4” X 55-1/2” *(56.5 X 140.9cm)*	6.2 amps. - 120V - 1/4HP	242 *(109.7kg)*
WCMD-C-5	5	19-7/8” X 66-3/4” X 9-3/4” *(50.4 X 169.5 X 24.7cm)*	71” *(180.3cm)*	7” *(17.7cm)*	21-1/2” *(54.6cm)*	21-5/8” *(54.9cm)*	22-1/4” X 69-1/4” *(56.5 X 175.8cm)*	6.5 amps. - 120V - 1/3HP	278 *(126kg)*
WCMD-C-6	6	19-7/8” X 80-1/2” X 9-3/4” *(50.4 X 204.4 X 24.7cm)*	84-3/4” *(215.2cm)*	7” *(17.7cm)*	21-1/2” *(54.6cm)*	21-5/8” *(54.9cm)*	22-1/4” X 83” *(56.5 X 210.8cm)*	6.5 amps. - 120V - 1/3HP	336 *(152.4kg))*

REMOTE REFRIGERATION MODEL	LESS COMP. SHIP WT. (LBS.)
WCMD-C-X-1	92 *(41.7kg)*
WCMD-C-X-2	143 *(64.8kg)*
WCMD-C-X-3	171 *(77.5kg)*
WCMD-C-X-4	184 *(83.4kg)*
WCMD-C-X-5	225 *(102kg)*
WCMD-C-X-6	290 *(131.5kg)*

REFRIGERATION CHART							
MODEL	HP	REF.	OZ.	LOW PSIG.	HIGH PSIG.	BTU M10 90A	OPERATING TEMP
WCMD-C-1	1/5	R513A	9.5	8	175	450	32 TO 40 F
WCMD-C-2	1/5	R513A	10	8	175	450	32 TO 40 F
WCMD-C-3	1/5	R513A	12	8	175	450	32 TO 40 F
WCMD-C-4	1/4	R513A	12.5	8	175	720	32 TO 40 F
WCMD-C-5	1/3	R513A	13	8	175	850	32 TO 40 F
WCMD-C-6	1/3	R513A	13.5	8	175	850	32 TO 40 F

*****UNITS ARE PERFORMANCE TESTED WITH REFRIGERANTS LISTED IN CHART ABOVE, TO THEIR RESPECTIVE MODELS. PERFORMANCE MAY VARY WITH ALTERNATE REFRIGERANTS. SUPPORT AND COMPONETS FOR ALTERNATE REFRIGERANTS VARY*****

REFRIGERATED COLD PAN WITHOUT COMPRESSOR REQUIRED:

SOLENOID PACKAGE, LOOSE: **DIGITAL THERMOSTAT, CAPILLARY TUBE, THERMOSTAT BRACKET, FILTER DRIER (TO BE INSTALLED AT FIELD) AND REFRIGERATION SOLENOID VALVE**
SOLENOID PACKAGE, FACTORY INSTALLED: **DIGITAL THERMOSTAT, CAPILLARY TUBE, THERMOSTAT BRACKET, FILTER DRIER (TO BE INSTALL AT FIELD) AND REFRIGERATION SOLENOID VALVE**
******SOLENOID PACKAGE COMPONENTS ONLY AVAILABLE FOR REFRIGERANT R448A/R513A*** CUSTOMER IS RESPONSIBLE FOR HOOK UP AND TIE IN COMPONENTS FOR OTHER REFRIGERANT******

COMPRESSORS FOR REMOTE INSTALLATIONS

2029-1M7 - 1/5 HP for WCMD-C-X-1, 2, & 3
2029-2M7 - 1/4 HP for WCMD-C-X-4
2029-4M7 - 1/3 HP for WCMD-C-X-5 & 6

*****NOTE*****WCMD-C-X REQUIRED A SOLENOID PACKAGE

******LESS COMPRESSORS UNITS ARE CURRENTLY INCOMPATIBLE WITH A2L AND A3 REFRIGERANT SUCH AS R290*****
******ORDERS NOT FINAL UNTIL REFRIGERANT APPROVED******