



**ATLAS METAL**

1135 N.W. 159th DRIVE, MIAMI, FLORIDA 33169

TEL 305.625.2451

TOLL FREE 800.762.7565

FAX 305.623.0475

WWW.ATLASFOODSERV.COM

SALES@ATLASFOODSERV.COM

Project: \_\_\_\_\_

Item No.: \_\_\_\_\_

Quantity: \_\_\_\_\_

**MODULAR UNITS INF SERIES**



**COLD FOOD UNIT**

Iced Cold Pan

- INFIC-2
- INFIC-3
- INFIC-4
- INFIC-5
- INFIC-6

**SPECIFICATIONS**

**TOP:** Constructed of 16 gauge, type 304 stainless steel, die-formed, welded, ground and polished. The top is provided with an opening to receive the appropriately sized drop-in unit.

**BODY:** Frame construction shall be of hi-tensile stainless steel square tubing, 1-1/4" x 1-1/4". Frame sections are welded construction, ground and polished to a uniform finish. Body & panel is constructed from 18 gauge stainless steel with 1/16" thick plastic laminate Front & ends. rear aprons is constructed from 16 gauge stainless steel with 1/16" thick plastic laminate finish. Owner to specify finish. An integral locking device shall be provided to align and retain cart positioning when two or more carts are joined.

**ICED COLD PAN:** The cart includes a WIC series built-in iced cold pan installed in the top. Constructed of 18 gauge, type 304 stainless steel, with a raised perimeter bead and solid vinyl gasket. The pan is fully insulated with high density polystyrene, 1" thick on all sides, 2" thick on the bottom, and enclosed with a 22 gauge galvanized steel outer case. The interior liner is fabricated with 1/4" radius coved corners. A 3/4" dia. drain with strainer, 4" PVC nipple and valve is provided. Embossed mounting lugs are provided, along the inner surface of the top, to hold the removable separator channel(s) in place.

Separator channel(s) to hold 12"x20" food pans are included.

**CASTERS:** The casters shall be 4" diameter, non-marking rubber tired, swivel type with ball bearings in both swivel and axle raceways, provided with grease fittings. Both casters on operator's side have toe activated brakes.


*Specifications subject to change without notice.*

**STANDARD FEATURES**


- Fully insulated to hold ice longer - can be used for ice display, 12" x 20" pans, or fractional size pans with the use of adapter bars
- Positive self-locking device - keeps tops level and equipment in place
- Fully mobile - each unit is provided with 5" dia. swivel casters, two with brakes
- **US** - Undershelf, S/S, removable
- Versatile - available in a wide range of sizes and a wide variety of finishes and colors
- 1-Year Parts & Labor Warranty
- NSF Approved, UL Listed

**ACCESSORIES**


- **TS** - Tray Slide, 12" wide, S/S, solid, ribbed, fold-down
- **SH** - Work Shelf, 8" wide, S/S, fold-down
- **CB** - Work Shelf, 8" wide, hardwood maple, fold-down
- **CR** - Work Shelf, 8" wide, Richlite, fold-down
- **ES** - End Shelf, 16" wide, S/S, fold-down
- **CBE** - End Shelf, 16" wide, hardwood maple, fold-down
- **RPS** - Rear Sliding Doors, removable
- **HD** - Hinged Doors, S/S
- **DL** - Door Locks (set)(for **RPS** or **HD**)
- **Sneeze Guards** - various styles available (see sneeze guard section of catalog)
- **CO** - Convenience Outlet (specify base or apron mount)
- **CO-DUP** - Convenience Outlet, Duplex receptacle
- **JBC** - Outlet Box in base, 4x4 (120V) with cord
- **ERS** - Electrical Raceway System
- **P-CAST** - Polyurethane Casters, 2-W/Brakes
- **WFB** - Perforated false bottom
- Stainless Steel Adapter Plates & Adapter Bars (pgs. DI-51 - DI-52)
- **CP** - Cover Plate with handles, S/S
- **RDVE** - Rear Drain Valve Extension
- **Solid SurfaceTop**

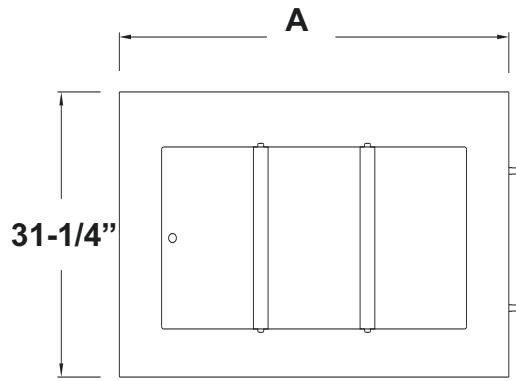

**PLAN VIEW**

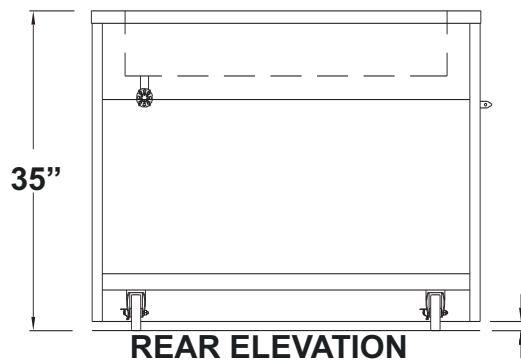

**REAR ELEVATION**



**END VIEW**

MODEL	"A"	PAN OPENINGS	PAN SIZE*	SHIP WT. (lbs.)
INFIC-2	36-1/2" (92cm)	2	19-7/8" X 25-1/2" X 4-5/8" (50.4 X 64.7 X 11.7cm)	198 (90kg)
INFIC-3	50-1/4" (127cm)	3	19-7/8" X 39-1/4" X 4-5/8" (50.4 X 99.6 X 11.7cm)	252 (114.3kg)
INFIC-4	64" (161.9cm)	4	19-7/8" X 53" X 4-5/8" (50.4 X 134.6 X 11.7cm)	330 (150kg)
INFIC-5	77-3/4" (196.8cm)	5	19-7/8" X 66-3/4" X 4-5/8" (50.4 X 169.5 X 11.7cm)	396 (180kg)
INFIC-6	91-1/2" (231.7cm)	6	19-7/8" X 80-1/2" X 4-5/8" (50.4 X 204.4 X 11.7cm)	462 (210kg)