



# ATLAS METAL

1135 N.W. 159th DRIVE, MIAMI, FLORIDA 33169

TEL 305.625.2451

TOLL FREE 800.762.7565

FAX 305.623.0475

WWW.ATLASFOODSERV.COM

SALES@ATLASFOODSERV.COM

Project: \_\_\_\_\_

Item No.: \_\_\_\_\_

Quantity: \_\_\_\_\_

## SELF LEVELING DISPENSERS



PDH-TA-9-1/8

### PLATE DISPENSER

Thermal Air Heating

- PDH-TA-9-1/8
- PDH-TA-10-1/8
- PDH-TA-12
- PDH-TA-14-1/2

#### SPECIFICATIONS

The basic unit shall be constructed of 300 series stainless steel. The dispensers shall be a drop-in, self-leveling design.

The counter top flange has three, high impact, plastic guide posts to align plates. The unit is self supporting, with vertical side panels and a bottom and top flange all welded to form the dispenser body. The stainless steel dispenser head will be suspended from the extension springs to support the stack of plates to be dispensed.

**PDH-TA:** Basic construction with the addition of a base mounted, thermally protected fan motor & heating element, for heat circulation, side mounted thermostat, an additional stainless steel shield which covers the spring mechanism and vertical channel guides, flange mounted pilot light and on/off switch. A 6' 16-3 cord set, NEMA 5-15P, will be provided.

**SELF LEVELING:** The spring mechanism is easy to adjust. A combination of extension springs will be provided for field adjusting to the required dispensing height.


#### STANDARD FEATURES

- Field Adjustable
- All stainless steel construction
- High impact plastic guide posts to align plates
- Thermally protected fan motor for heat circulation

#### ACCESSORIES

- Modify tube depth
- 220/240 volt operation (specify)
- Stainless steel trays to convert **PD-12** to cup dispenser
- Stainless steel pre-heat tube covers

*Specifications subject to change without notice.*

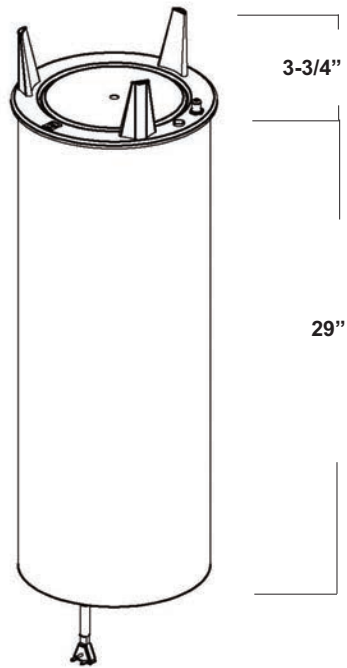

### HEATED DROP-IN SHIELDED TUBE / THERMAL AIR

MODEL	ELEC @120V IPH		MAXIMUM PLATE SIZE	OUTSIDE FLANGE DIAMETER	CUT-OUT DIAMETER	SHIP WT. (lbs.)
	WATTS	AMPS				
PDH-TA-9-1/8	535	4.5	9-1/8" (23.1cm)	12-1/2" (31.7cm)	11-7/8" (30.1cm)	28 (12.7kg)
PDH-TA-10-1/8	535	4.5	10-1/8" (25.7cm)	13-1/2" (34.2cm)	12-7/8" (32.6cm)	33 (14.9kg)
PDH-TA-12	535	4.5	12" (30.4cm)	15-3/8" (39cm)	14-3/4" (37.4cm)	35 (15.8kg)
PDH-TA-14-1/2	535	4.5	14-1/2" (36.8cm)	17-7/8" (45.3cm)	17-1/4" (43.8cm)	38 (17.2kg)