



ATLAS METAL

1135 N.W. 159th DRIVE, MIAMI, FLORIDA 33169

TEL 305.625.2451

TOLL FREE 800.762.7565

FAX 305.623.0475

WWW.ATLASFOODSERV.COM

SALES@ATLASFOODSERV.COM

Project: _____
Item No.: _____
Quantity: _____

DROP-IN SERVING EQUIPMENT



FROST TOP

Refrigerated,
Self-Contained

- ☐ WF-2
- ☐ WF-3
- ☐ WF-4
- ☐ WF-5
- ☐ WF-6

SPECIFICATIONS

TOP: Constructed of 14 gauge, type 304 stainless steel, die stamped with a raised perimeter bead. There shall be a solid vinyl gasket under the beaded edge to form a seal to the counter top, thus preventing seepage or marring of the counter top.

FROST TOP: Constructed of 14 gauge, type 304 stainless steel, one piece construction, all welded, ground and polished to a uniform finish. The top is formed to stand 1" above the counter top and is provided with a 1/2" full perimeter gutter to collect condensation; a 1" I.P.S. drain is provided. The frost top has copper tubing firmly soldered to the exterior bottom.

INSULATION: The pan is fully insulated with high density fiberglass and polystyrene, 1-1/2" thick, and enclosed with an 18 gauge galvanized steel outer case.

REFRIGERATION SYSTEM: The compressor housing shall be fabricated from 14 gauge galvanized steel and bolted to the base of the unit. A fully self-contained condensing unit is provided with a hermetically sealed compressor. The system is fully charged with CFC free refrigerant and ready to operate.

NOTE: Proper ventilation must be provided in counter.

ELECTRICAL: The unit will be wired for 15 amps., 120 volt, single phase operation with an on/off switch and pilot light. A 6' long 3-wire cord and plug (NEMA 5-15P) will be provided.

Specifications subject to change without notice.

STANDARD FEATURES

- "Quick" frost top, stands 1" above counter for attractive display - ideal for pre-plated cold food
- Fully insulated for maximum efficiency and energy savings
- Factory applied gasket - makes installation a snap and seals units to the counter top, thus eliminating seepage
- 1-Year Parts & Labor Warranty
- NSF Certified and UL Listed


ACCESSORIES

- 5YW - 5-Year Compressor Warranty
- WFFT - Flush recessed top for frost top units
- RS - Remote on/off switch for counter mounting
- RDVE - Rear Drain Valve Extension
- * 220 Volt - 50 Cycle Compressor

*Please see Operation & Installation Manual for ALL operation and maintenance details.

* Units with these accessories are not currently UL listed.

DI-35

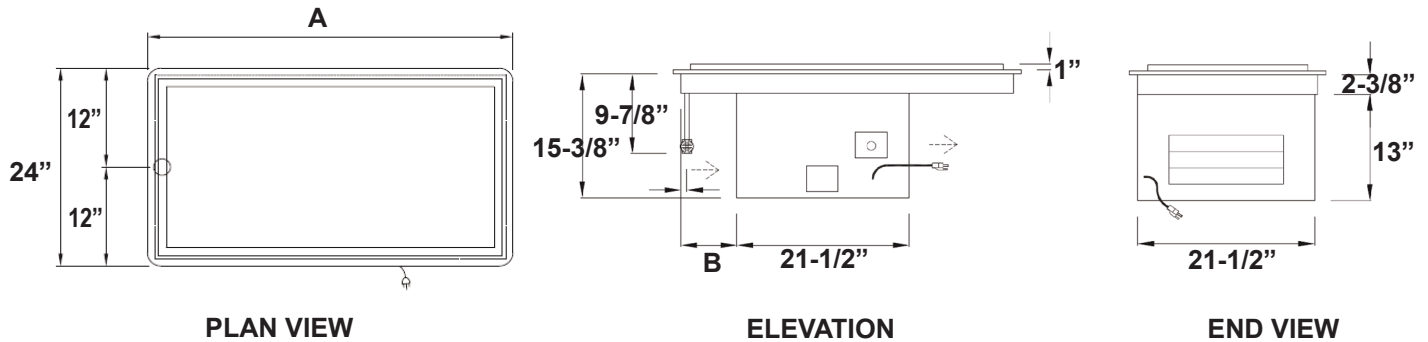

MODEL	FROST TOP SIZE	"A"	"B"	CUT-OUT REQUIRED	ELECTRICAL CHARACTERISTICS	SHIP WT. (LBS.)
WF-2	19-1/2" X 25-1/4" (49.5 X 64.1cm)	29-3/4" (75.5cm)	6" (15.2cm)	22-1/4" X 28" (56.5 X 71.1cm)	4.2 amps. - 120V - 1/5HP	171 (77.6kg)
WF-3	19-1/2" X 39" (49.5 X 99cm)	43-1/2" (110.4cm)	7" (17.7cm)	22-1/4" X 41-3/4" (56.5 X 106cm)	6.2 amps. - 120V - 1/4HP	207 (93.9kg)
WF-4	19-1/2" X 52-3/4" (49.5 X 133.9cm)	57-1/4" (145.4cm)	7" (17.7cm)	22-1/4" X 55-1/2" (56.5 X 140.9cm)	6.5 amps. - 120V - 1/3HP	236 (107kg)
WF-5	19-1/2" X 66-1/2" (49.5 X 168.9cm)	71" (180.3cm)	7" (17.7cm)	22-1/4" X 69-1/4" (56.5 X 175.8cm)	11.0 amps. - 120V - 1/2HP	263 (119.3kg)
WF-6	19-1/2" X 80-1/4" (49.5 X 203.8cm)	84-3/4" (215.2cm)	7" (17.7cm)	22-1/4" X 83" (56.5 X 210.8cm)	11.0 amps. - 120V - 1/2HP	328 (148.8kg)

REFRIGERATION CHART						
MODEL	HP	REF.	OZ.	LOW PSIG.	HIGH PSIG.	BTU M10 90A
WF-2	1/5	R513A	11	8	150	450
WF-3	1/4	R513A	12	8	150	720
WF-4	1/3	R513A	13	8	150	850
WF-5	1/2	R513A	20	8	150	1390
WF-6	1/2	R513A	21	8	150	1390

MODEL	WT. LESS COMP. (LBS.)
WFX-2	130 (59kg)
WFX-3	160 (72.6kg)
WFX-4	190 (86.2kg)
WFX-5	217 (98.4kg)
WFX-6	252 (114.3kg)

NOTEWFX
REQUIRED A SOLENOID
PACKAGE AND RS, REMOTE
CONTROL PANEL

REFRIGERATED COLD PAN WITHOUT COMPRESSOR REQUIRED:

SOLENOID PACKAGE, LOOSE: SOLENOID VALVE, SOLENOID COIL & COOPER FITTING

SOLENOID PACKAGE, FACTORY INSTALLED: SOLENOID BOX, SOLENOID VALVE, COIL & COOPER FITTING

****ORDERS NOT FINAL UNTIL REFRIGERANT APPROVED****

COMPRESSORS FOR REMOTE INSTALLATIONS

2029-1M7 - 1/5 HP for WFX-2
2029-2M7 - 1/4 HP for WFX-3
2029-4M7 - 1/3 HP for WFX-4
2029-6M7 - 1/2 HP for WFX-5 & 6

*** UNIT'S PERFORMANCE TESTED WITH LISTED REFRIGERANTS IN THE CHART ABOVE. PERFORMANCE MAY VARY WITH ALTERNATE REFRIGERANTS.***